

THE RIGHT ANALYZER FOR YOUR APPLICATION!

RM CEM O₂/IQ 19" RACK MOUNT SMART OXYGEN ANALYZER

EXTRACTIVE NET OXYGEN ANALYZER FOR USE IN A WET OR DRY GAS CEM SYSTEM WITH INTEGRAL KEYPAD AND DISPLAY



Principle of Operation: Zirconium oxide

Operating Range: 0.1-100% Oxygen

Display: Four-line by 20-character extended temperature Supertwist Nematic LCD (back-lit). Displays combinations of oxygen, cell temperature, user programmable text, thermocouple mV or cell mV. Password protection and programmable process pressure correction are also provided.

Accuracy: ±0.75% of reading or 0.05% oxygen, whichever is greater.

Response Time: < 4 seconds to 90% step response change; < 2 seconds to 63% step response change at 2 SCFH (0.94 L/min.) from 2% to 20% O₂.

Repeatability: ±1% of reading or 0.1% absolute, whichever is greater

Drift: < 0.1% of cell output per month (< 0.005% O₂ per month with 2% O₂ applied)

Max. Inlet Temperature: 204°C (400°F)

Sample Flow: 2 to 20 SCFH (0.94 to 9.41 L/min.)

Analog Output: Isolated linear current output. Select O₂, cell temperature, thermocouple mV or cell mV. The output can be 4-20 mA, 0-20 mA, 20-4 mA, or 20-0 mA, and is fully scalable. Hold and track during calibration. Maximum load 1000 ohms.

Alarm: Alarm can be set to oxygen, start of calibration, start of verification or both.

Contact Rating: 1A, 30V max., non-inductive load, AC or DC.

Diagnostics: Watchdog timer/service alarm (trouble alarm). System test for A/D, RAM and EPROM. Twenty entry event log.

Communications: RS-485, RS-232 (IQ Links), HART[®] Option available.

Calibration: Oxygen cell lifetime extender. Calibrate or verify calibration. Store last calibration and verification data. Selectable calibration gas run time and process recovery time. Timed automatic calibration with optional remote calibration unit.

Environment

Ambient Temp: 0°F to 140°F (-18°C to 60°C)

Operating Temp: -20°C to 70°C (See Note 1)

Relative Humidity: 10% to 80%, non-condensing

Enclosure: Indoor use only

Power Requirements: 115 VAC, 50-60 Hz, ±10%; 230 VAC, 50-60 Hz, ±10%; 100 VA max.

Calibration Gas Requirements: Use calibration gases at 4 SCFH (2 L/min)

O₂ Zero Gas: 0.1-10% O₂, balance N₂

O₂ Span Gas: Minimum one decade above zero gas (10 times greater)


System Compliance

EMC Compliance: 89/336/EEC


Safety Compliance: 73/23/EEC

DIMENSIONS


INCHES
CM

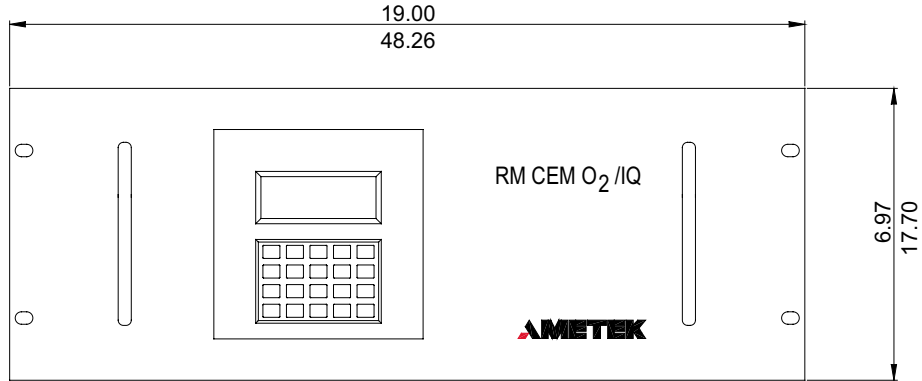

FRONT VIEW

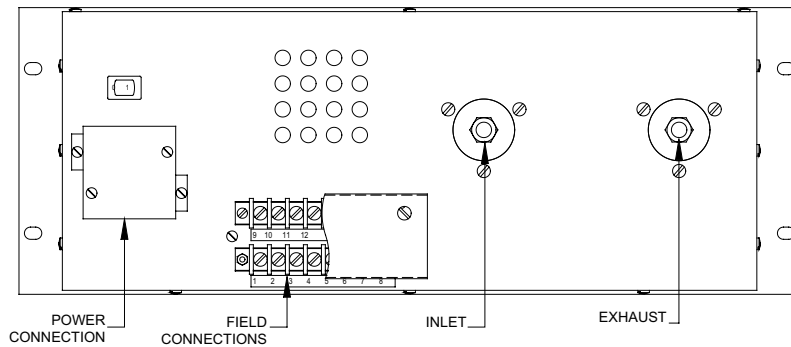

REAR VIEW

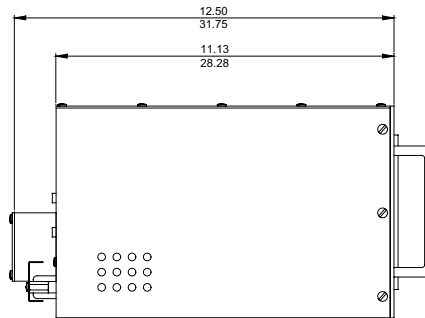

SIDE VIEW

APPROX. WEIGHT: 17 LB (7.7 KG)

NOTES: 1. Operating temperature of electronics inside the electronics housing is measured by IQ Link, RS247 Web Enabled Remote System, Series 2000 Host, or Hart Communicator. 2. All static performance characteristics are with operating variables constant. 3. System accuracy referenced to 0.1 to 10% calibrated range.

One of a family of innovative process analyzer solutions from AMETEK Process Instruments. Specifications subject to change without notice.

USA - Pennsylvania
150 Freeport Road
Pittsburgh, PA 15238
Ph. 412-828-9040
Fax 412-826-0399

USA - Delaware
455 Corporate Blvd.
Newark, DE 19702
Ph. 302-456-4400
Fax 302-456-4444

AMETEK®
PROCESS INSTRUMENTS
www.thermox.com

SUPPORT LOCATIONS

USA - Texas
Ph. 281-463-2820
Fax 281-463-2701

FRANCE
Ph. 33 1 30 68 69 20
Fax 33 1 30 68 69 29

GERMANY
Ph. 49 21 59 91 36 0
Fax 49 21 59 91 3680

CANADA
2876 Sunridge Way N.E
Calgary, AB T1Y 7H9
Ph. 403-235-8400
Fax 403-248-3550

MANUFACTURING LOCATIONS
REGISTERED
ISO 9001
MANAGEMENT SYSTEM

© 2003, by AMETEK, Inc. All rights reserved.
1203PDF (P640)



CHINA - Beijing
Ph. 86-10-85262111
Fax 86-10-85262141

MIDDLE EAST - Dubai
Ph. 971-4-881 2052
Fax 971-4-881 2053

CHINA - Shanghai
Ph. 86 21 6426 7049
Fax 86 21 6426 7054

SINGAPORE
Ph. 65-6484-2388
Fax 65-6481-6588